




Canon EOS 30 Remote Control Socket Replacement

How to access the Remote Control Socket.

Written By: Antonia

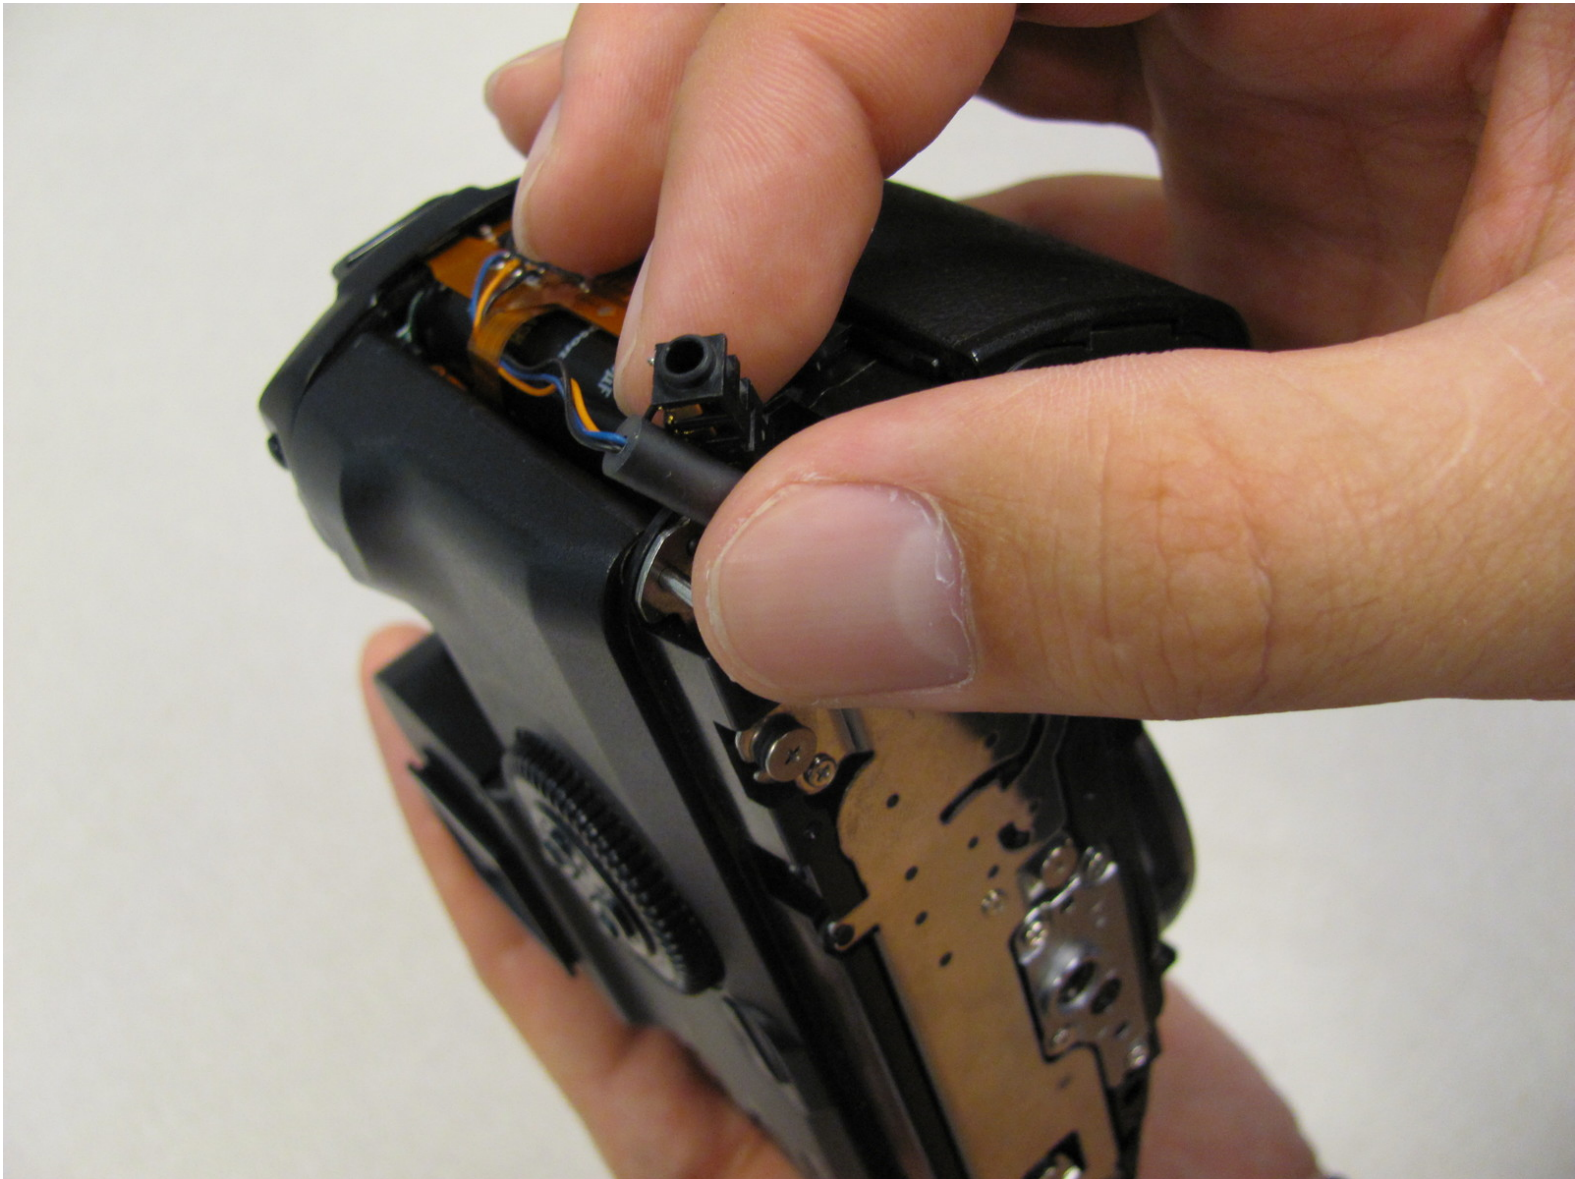

INTRODUCTION

The Remote Control Socket is not difficult to access. However, it's connections are soldered, so it will be difficult to remove.



TOOLS:

- [Phillips #00 Screwdriver](#) (1)
-

Step 1 — Front Panel



- Remove two 4.8 mm black screws on the front of the camera.

Step 2



- Remove one 4.3 mm black screw under the lens ring and one 4.8 mm black screw on the bottom of the camera.

Step 3



- Remove one 4.8 mm black screw on the left side.

Step 4



- Remove the front panel by lifting out the side opposite the grip.

Step 5 — Bottom Panel



- Remove seven 4.25 mm black screws on the bottom panel.

Step 6



- Remove the bottom panel.

Step 7 — Side Panel With Remote Control Socket




- Remove two 6.5 mm black screws from the panel.

Step 8




- Remove plastic Remote Control Socket cap by pulling it straight out.

Step 9

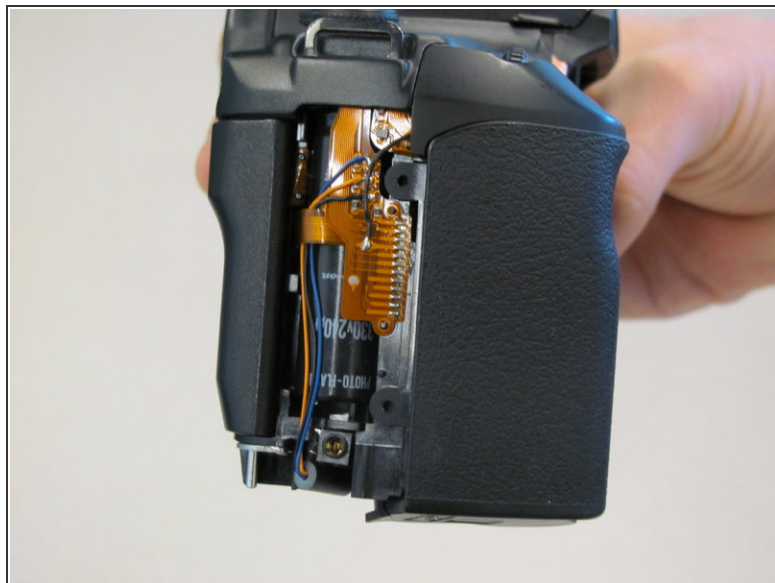



- Slide panel toward bottom of camera to remove.

Step 10 — Remote Control Socket

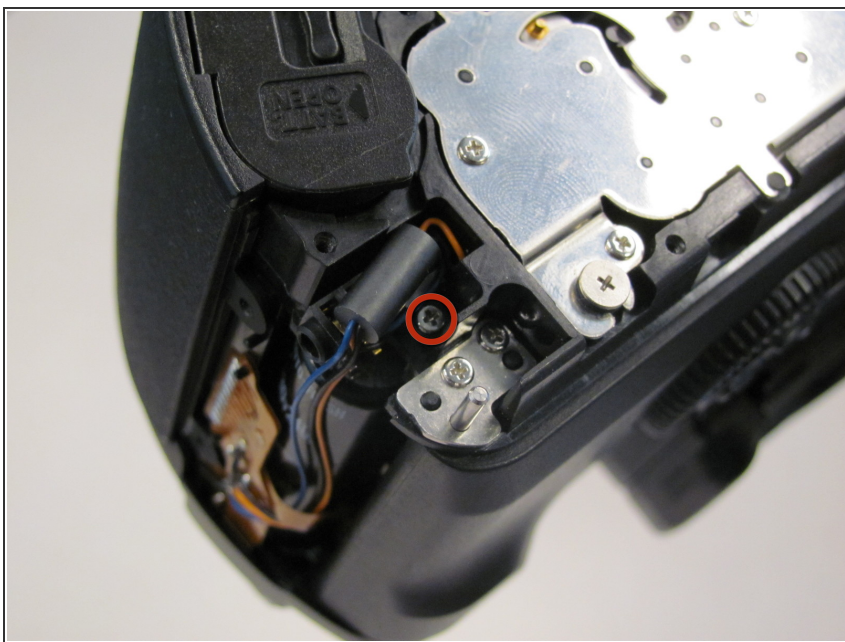

- Remove one 4.8 mm silver screw securing Remote Control Socket to camera.

Step 11

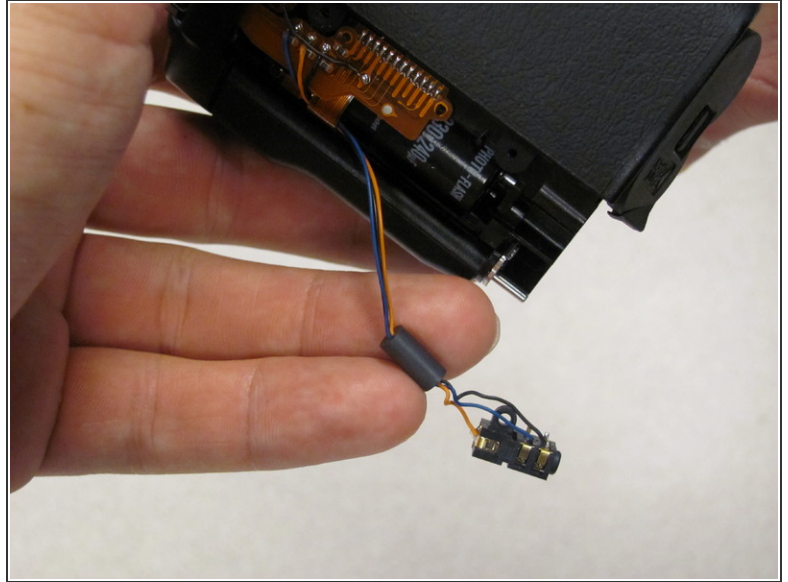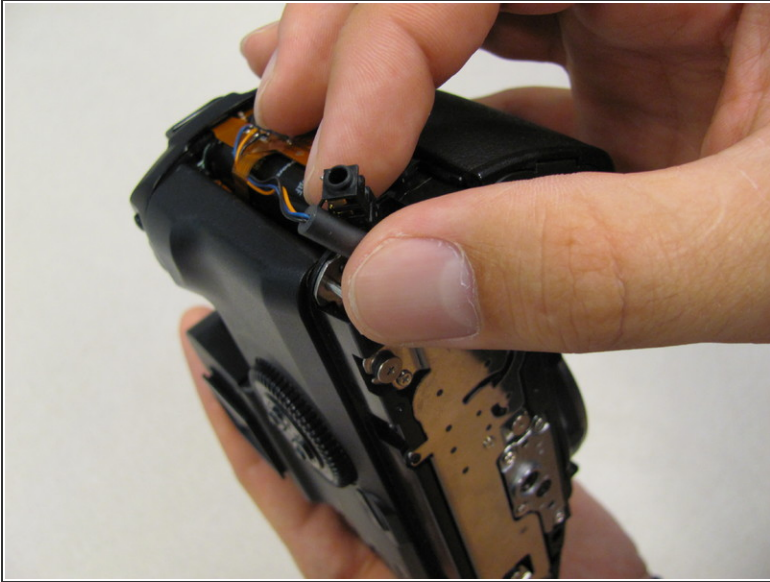

- Remote Control Socket is now secured by 3 wires.
- Desolder connections to replace Remote Control Socket.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-09-17 08:13:41 PM.